

### 1070-04


噴頭規格：1/2"  
噴灑角度：全迴轉  
操作壓力：2.0~4.0 kg/cm<sup>2</sup>  
噴灑半徑：8.6~10.2 m  
噴灑流量：14.9~19.7 lpm

測試壓力 (kg/cm <sup>2</sup> )	流量 (l/min)	噴灑半徑 (m)
2.0	14.9	8.6
2.5	16.7	8.8
3.0	18.3	8.9
3.5	18.8	9.5
4.0	19.7	10.2

### 1071-04

噴頭規格：1/2"  
噴灑角度：10~360°/全迴轉  
操作壓力：2.0~4.0 kg/cm<sup>2</sup>  
噴灑半徑：8.8~12.7 m  
噴灑流量：11.9~19.3 lpm

測試壓力 (kg/cm <sup>2</sup> )	流量 (l/min)	噴灑半徑 (m)
2.0	11.9	8.8
2.5	15.4	9.1
3.0	16.9	9.7
3.5	18.1	10.2
4.0	19.3	10.7

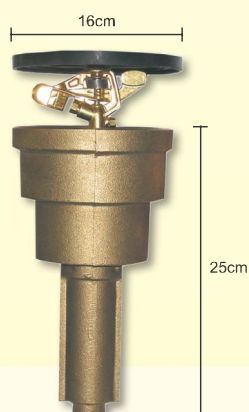

### 1070-06


噴頭規格：3/4"  
噴灑角度：全迴轉  
操作壓力：2.0~4.0 kg/cm<sup>2</sup>  
噴灑半徑：10.2~13.1 m  
噴灑流量：19.2~26.8 lpm

測試壓力 (kg/cm <sup>2</sup> )	流量 (l/min)	噴灑半徑 (m)
2.0	19.2	10.2
2.5	21.6	11.1
3.0	23.5	11.8
3.5	25.1	12.4
4.0	26.8	13.1

### 1071-06

噴頭規格：3/4"  
噴灑角度：10~360°/全迴轉  
操作壓力：2.0~4.0 kg/cm<sup>2</sup>  
噴灑半徑：11.2~13.8 m  
噴灑流量：12.3~20.3 lpm

測試壓力 (kg/cm <sup>2</sup> )	流量 (l/min)	噴灑半徑 (m)
2.0	12.3	11.2
2.5	13.6	11.8
3.0	17.5	12.5
3.5	18.1	12.7
4.0	20.3	13.8

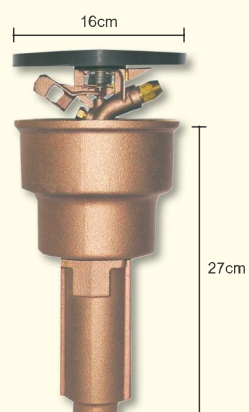

### 1070-10

噴頭規格：1"  
噴灑角度：全迴轉  
操作壓力：2.0~6.0 kg/cm<sup>2</sup>  
噴灑半徑：12~16 m  
噴灑流量：32~59 lpm

測試壓力 (kg/cm <sup>2</sup> )	流量 (l/min)	噴灑半徑 (m)
2.0	32	12.0
3.0	40	13.0
4.0	48	14.0
5.0	52	15.1
6.0	59	16.0

### 1071-10

噴頭規格：1"  
噴灑角度：10~360°/全迴轉  
操作壓力：2.0~6.0 kg/cm<sup>2</sup>  
噴灑半徑：12.0~16.0 m  
噴灑流量：29~52 lpm

測試壓力 (kg/cm <sup>2</sup> )	流量 (l/min)	噴灑半徑 (m)
2.0	29	12.0
3.0	33	13.0
4.0	46	14.0
5.0	50	15.1
6.0	52	16.0



### 1073

噴頭規格：1/2", 3/4"  
噴灑角度：10~360°/全迴轉  
操作壓力：2.0~4.0 kg/cm<sup>2</sup>  
噴灑半徑：7.7~9.0 m  
噴灑流量：14.9~23.1 lpm

(B) 壓力 (kg/cm <sup>2</sup> )	(Q) 流量 (l/min)	(R) 半徑 (m)
1.0	10.6	7.7
1.5	12.8	8.0
2.0	14.5	8.1
2.5	16.1	8.1
3.0	17.5	8.1



### 1072

噴頭規格：1/2", 3/4"  
噴灑角度：10~360°/全迴轉  
操作壓力：2.0~4.0 kg/cm<sup>2</sup>  
噴灑半徑：8.8~10.0 m  
噴灑流量：10.0~24.0 lpm

(B) 壓力 (kg/cm <sup>2</sup> )	(Q) 流量 (l/min)	(R) 半徑 (m)
1.0	10.3	8.8
1.5	12.5	9.2
2.0	14.4	9.3
2.5	16.1	9.4
3.0	17.6	9.4

### ※銅心軸



### 1070B-04

噴頭規格：1/2"  
噴灑角度：全迴轉  
操作壓力：2.0~4.0 kg/cm<sup>2</sup>  
噴灑半徑：8.6~11.5 m  
噴灑流量：14.9~23.1 lpm

### 1071B-04

噴頭規格：1/2"  
噴灑角度：10~360°/全迴轉  
操作壓力：2.0~4.0 kg/cm<sup>2</sup>  
噴灑半徑：9.7~12.8 m  
噴灑流量：9.6~19.3 lpm

### 1070B-06

噴頭規格：3/4"  
噴灑角度：全迴轉  
操作壓力：2.0~4.0 kg/cm<sup>2</sup>  
噴灑半徑：10.0~13.5 m  
噴灑流量：19.1~28.4 lpm

### 1071B-06

噴頭規格：3/4"  
噴灑角度：10~360°/全迴轉  
操作壓力：2.0~4.0 kg/cm<sup>2</sup>  
噴灑半徑：10.3~13.8 m  
噴灑流量：10.1~20.3 lpm

### 1070B-10

噴頭規格：1"  
噴灑角度：全迴轉  
操作壓力：2.0~4.0 kg/cm<sup>2</sup>  
噴灑半徑：12.0~16.0 m  
噴灑流量：45.0~78.0 lpm

### 1071B-10

噴頭規格：1"  
噴灑角度：10~360°/全迴轉  
操作壓力：2.0~6.0 kg/cm<sup>2</sup>  
噴灑半徑：12.0~16.0 m  
噴灑流量：32.0~56.0 lpm




### RB-2045A-5

噴頭規格：3/4"  
噴灑角度：全迴轉/可調  
操作壓力：2.0~4.0 kg/cm<sup>2</sup>  
噴灑半徑：8.6~11.5 m  
噴灑流量：14.9~23.1 lpm


RAIN BIRD  
S：含低壓止水






### 1078A

噴頭規格：1/2"  
噴灑角度：  
90°, 180°, 270°, 360°, 長方型  
噴灑半徑：2.5~4m



### 1078B

噴頭規格：1/2"  
噴灑角度：  
90°, 180°, 270°, 360°, 長方型  
噴灑半徑：2.5~4m



### 1078C

噴頭規格：1/2"  
噴灑角度：  
90°, 180°, 270°, 360°  
噴灑半徑：2.5~4m




### 1075X 台製

噴頭規格：1/2"  
噴灑角度：5~360°  
噴灑半徑：3~4m  
跳昇高度：2"(5cm)  
4"(10cm)  
(噴嘴不可更換)




### 1076

噴頭規格：1/2"  
噴灑角度：  
90°, 180°, 270°, 360°  
噴灑半徑：3~4m  
跳昇高度：3"(7.5cm)



### 1076B

噴頭規格：1/2"  
噴灑角度：  
90°, 180°, 270°, 360°, 長方型  
噴灑半徑：3~4m  
跳昇高度：3"(7.5cm)

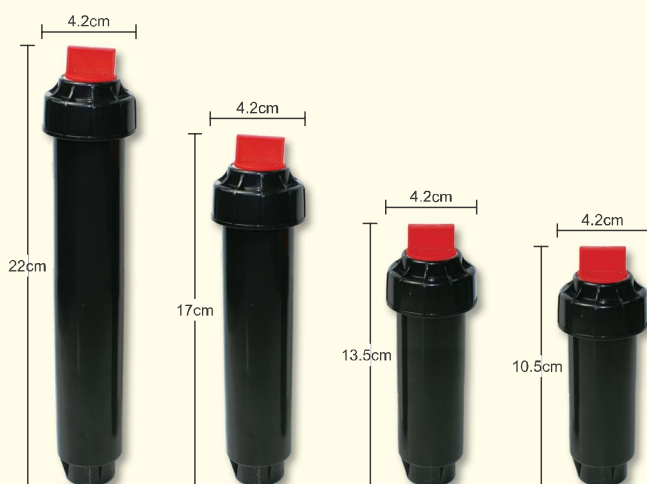

### 1075AL (銅上蓋)

噴頭規格：1/2"  
噴灑角度：5~360°  
噴灑半徑：6A:1.8m 8A:2.4m  
10A:3.0m 12A:3.6m  
15A:4.6m 17A:5.5m  
跳昇高度：2"(5cm), 3"(7.5cm)  
4"(10cm), 6"(15cm)  
※含低壓止水閥

### 1075AW (塑上蓋)

噴頭規格：1/2"  
噴灑角度：5~360°  
噴灑半徑：6A:1.8m 8A:2.4m  
10A:3.0m 12A:3.6m  
15A:4.6m 17A:5.5m  
跳昇高度：2"(5cm), 3"(7.5cm)  
4"(10cm), 6"(15cm)  
※含低壓止水閥

PS. 銅上蓋可以避免割草機破壞噴嘴





### 1075H

噴頭規格：1/2"  
噴灑角度：5~360°  
噴灑半徑：6A:1.8m 8A:2.4m  
10A:3.0m 12A:3.6m  
15A:4.6m 17A:5.5m

長方型：15SST  
15CST  
15EST

請參考第17頁  
跳昇高度：2"(5cm)  
4"(10cm)



### 1075US

噴頭規格：1/2"  
噴灑角度：5~360°  
噴灑半徑：6A:1.8m 8A:2.4m  
10A:3.0m 12A:3.6m  
15A:4.6m 17A:5.5m

長方型：15SST, 15CST, 15EST

請參考第17頁  
跳昇高度：2"(5cm)  
4"(10cm)

RAIN BIRD US



### 1075T

噴頭規格：1/2"  
噴灑角度：5~360°  
噴灑半徑：6A:1.8m 8A:2.4m  
10A:3.0m 12A:3.6m  
15A:4.6m 17A:5.5m

長方型：15SST, 15CST, 15EST

請參考第17頁  
跳昇高度：4"(10cm)  
TORO 570



### 1075HP

噴頭規格：1/2"  
噴灑角度：5~360°  
噴灑半徑：6A:1.8m 8A:2.4m  
10A:3.0m 12A:3.6m  
15A:4.6m 17A:5.5m

長方型：15SST, 15CST, 15EST

請參考第17頁  
跳昇高度：2"(5cm)  
4"(10cm)

HIT HP

\*可選配低壓止水閥



### 1075HPRO

噴頭規格：1/2"  
噴灑角度：5~360°  
噴灑半徑：6A:1.8m 8A:2.4m  
10A:3.0m 12A:3.6m  
15A:4.6m 17A:5.5m

長方型：15SST, 15CST, 15EST

請參考第17頁  
跳昇高度：4"(10cm)  
HUNTER PRO-SPRAY

\*可選配低壓止水閥



### 1075NRR

#### 旋轉型小噴嘴

噴頭規格：1/2"

噴灑角度：180°, 360°

噴灑半徑：R13-18:4.0-5.5m  
R17-24:5.2-7.3m

RAINBIRD R13-18H(F)  
R17-24H(F)



### 1075K

噴頭規格：1/2"

噴灑角度：5~360°

噴灑半徑：6A:1.8m 8A:2.4m 10A:3.0m  
12A:3.6m 15A:4.6m 17A:5.5m

長方型：15SST, 15CST, 15EST  
請參考第17頁

跳昇高度：3"(7.5cm), 4"(10cm)  
6"(15cm), 12"(30cm)

K RAIN



### 1075RP

噴頭規格：1/2"

噴灑角度：5~360°

噴灑半徑：6A:1.8m 8A:2.4m 10A:3.0m  
12A:3.6m 15A:4.6m 17A:5.5m

長方型：15SST, 15CST, 15EST

請參考第17頁

跳昇高度：2"(5cm), 4"(10cm)  
6"(15cm), 12"(30cm)

RAINPRO 900

\*可選配低壓止水閥



### 1075R

噴頭規格：1/2"

噴灑角度：5~360°

噴灑半徑：6A:1.8m 8A:2.4m 10A:3.0m  
12A:3.6m 15A:4.6m 17A:5.5m

長方型：15SST, 15CST, 15EST

請參考第17頁

跳昇高度：2"(5cm), 4"(10cm)  
6"(15cm), 12"(30cm)

RAIN BIRD 1800

\*可選配低壓止水閥





## 隱藏式小噴頭可搭配之噴嘴

景觀用隱藏式小噴頭 (半徑1.2~5.5m)


	4V			6V			8V			10V		
	壓力 (bars)	半徑 (m)	流量 (l/min)	壓力 (bars)	半徑 (m)	流量 (l/min)	壓力 (bars)	半徑 (m)	流量 (l/min)	壓力 (bars)	半徑 (m)	流量 (l/min)
90°	1.4	0.9	1.3	1.4	1.2	1.3	1.4	1.8	1.3	1.4	2.4	1.4
	1.7	0.9	1.4	1.7	1.5	1.4	1.7	2.1	1.4	1.7	2.8	1.6
	2.1	1.2	1.5	2.1	1.8	1.5	2.1	2.4	1.5	2.1	3.1	1.7
	2.4	1.5	1.7	2.4	2.1	1.7	2.4	2.4	1.7	2.4	3.4	1.9
180°	1.4	0.9	2.5	1.4	1.2	2.5	1.4	1.8	2.5	1.4	2.4	2.8
	1.7	0.9	2.9	1.7	1.5	2.9	1.7	2.1	2.9	1.7	2.7	3.2
	2.1	1.2	3.0	2.1	1.8	3.0	2.1	2.4	3.0	2.1	3.1	3.4
	2.4	1.5	3.4	2.4	2.1	3.4	2.4	2.4	3.4	2.4	3.4	3.8
270°	1.4	0.9	3.8	1.4	1.2	3.8	1.4	1.8	3.8	1.4	2.4	4.2
	1.7	0.9	4.3	1.7	1.5	4.3	1.7	2.1	4.3	1.7	2.7	4.8
	2.1	1.2	4.5	2.1	1.8	4.5	2.1	2.4	4.5	2.1	3.1	5.1
	2.4	1.5	5.0	2.4	2.1	5.0	2.4	2.4	5.1	2.4	3.4	5.7
360°	1.4	0.9	5.0	1.4	1.2	5.0	1.4	1.8	5.0	1.4	2.4	5.7
	1.7	0.9	5.7	1.7	1.5	5.7	1.7	2.1	5.7	1.7	2.7	6.5
	2.1	1.2	6.1	2.1	1.8	6.0	2.1	2.4	6.1	2.1	3.1	6.8
	2.4	1.5	6.8	2.4	2.1	6.8	2.4	2.4	6.8	2.4	3.4	7.6

	12V			15V			17V		
	壓力 (bars)	半徑 (m)	流量 (l/min)	壓力 (bars)	半徑 (m)	流量 (l/min)	壓力 (bars)	半徑 (m)	流量 (l/min)
90°	1.4	3.4	2.0	1.4	4.3	2.9	1.4	4.9	3.3
	1.7	3.7	2.2	1.7	4.6	3.3	1.7	5.2	3.9
	2.1	3.7	2.7	2.1	4.6	3.5	2.1	5.2	4.2
	2.4	4.0	2.9	2.4	4.9	3.9	2.4	5.5	4.3
180°	1.4	3.4	4.1	1.4	4.3	5.8	1.4	4.9	6.7
	1.7	3.7	4.3	1.7	4.6	6.6	1.7	5.2	7.8
	2.1	3.7	5.5	2.1	4.6	7.0	2.1	5.2	8.3
	2.4	4.0	5.8	2.4	4.9	7.8	2.4	5.5	8.7
270°	1.4	3.3	6.1	1.4	4.3	8.7	1.4	4.9	10.0
	1.7	3.7	6.4	1.7	4.6	9.9	1.7	5.2	11.7
	2.1	3.7	8.2	2.1	4.6	10.5	2.1	5.2	12.5
	2.4	4.0	8.7	2.4	4.9	11.7	2.4	5.5	13.0
360°	1.4	3.4	8.1	1.4	4.3	11.6	1.4	4.9	13.4
	1.7	3.7	8.6	1.7	4.6	13.3	1.7	5.2	15.6
	2.1	3.7	11.0	2.1	4.6	14.0	2.1	5.2	16.7
	2.4	4.0	11.7	2.4	4.9	15.6	2.4	5.5	17.3



1075NF (內牙)  
1075NM (外牙)

	壓力 (bars)	半徑 (m)	流量 (l/min)		壓力 (bars)	半徑 (m)	流量 (l/min)
15SST4	1.0	0.9 x 4.6	3.97	LCS-515	1.4	1.2 x 4.3	2.1
	1.4	1.2 x 4.9	4.62		1.7	1.5 x 4.6	2.3
	1.7	1.2 x 5.2	5.07		2.1	1.5 x 4.6	2.5
	2.0	1.2 x 5.5	5.68		2.4	1.5 x 4.6	2.6
9SST	1.0	2.7 x 4.6	3.18	RCS515	1.4	1.2 x 4.3	2.1
	1.4	2.7 x 4.9	3.67		1.7	1.5 x 4.6	2.3
	1.7	2.7 x 5.2	4.05		2.1	1.5 x 4.6	2.5
	2.0	2.7 x 5.5	4.54		2.4	1.5 x 4.6	2.6
15EST	1.0	1.2 x 4.9	1.59	SS-530	1.4	1.2 x 8.5	4.2
	1.4	1.2 x 4.3	1.82		1.7	1.5 x 9.1	4.5
	1.7	1.2 x 4.3	2.04		2.1	1.5 x 9.1	4.9
	2.0	1.2 x 4.6	2.27		2.4	1.5 x 9.1	5.3
15CST	1.0	1.2 x 7.9	3.18	Side Strip	2.8	1.5 x 9.1	5.7
	1.4	1.2 x 8.5	3.67				
	1.7	1.2 x 8.5	4.05				
	2.0	1.2 x 9.2	4.54				



### 1074H-04

噴頭規格：1/2"  
噴灑角度：5~360°  
噴灑半徑：4.6~9.1m  
跳昇高度：10cm

HUNTER SRM



### 1074H-06

1074HS-06 (不鏽鋼心軸)

噴頭規格：3/4"  
噴灑角度：5~360°  
噴灑半徑：8.2~15.8m  
跳昇高度：10cm

HUNTER PGP I-20-ADS



### 1074H-10

1074HS-10 (不鏽鋼心軸)

噴頭規格：1"  
噴灑角度：5~360°  
噴灑半徑：11.3~20.1m  
跳昇高度：10cm

HUNTER I25-ADV I25-ADS

景觀用隱藏式噴頭 (半徑4~20m)

1074H-04			
噴嘴	(B) 壓力 (bars)	(R) 半徑 (m)	(Q) 流量 (l/min)
.50	1.7	4.0	1.4
	2.0	4.3	1.6
	2.5	4.3	1.8
	3.0	4.6	2.0
	3.5	4.6	2.2
	3.8	4.9	2.3
.75	1.7	4.9	2.2
	2.0	5.2	2.4
	2.5	5.2	2.7
	3.0	5.5	3.0
	3.5	5.5	3.2
	3.8	5.8	3.4
1.0	1.7	5.8	2.9
	2.0	6.1	3.2
	2.5	6.1	3.5
	3.0	6.4	3.9
	3.5	6.4	4.2
	3.8	6.7	4.4
1.5	1.7	6.7	4.5
	2.0	7.0	4.8
	2.5	7.0	5.4
	3.0	7.3	6.0
	3.5	7.3	6.5
	3.8	7.6	6.7
2.0	1.7	7.3	5.8
	2.0	7.9	6.3
	2.5	7.9	7.1
	3.0	8.2	8.0
	3.5	8.2	8.8
	3.8	8.5	9.2
3.0	1.7	8.2	8.5
	2.0	8.5	9.3
	2.5	8.5	10.6
	3.0	9.1	12.0
	3.5	9.1	13.1
	3.8	9.4	13.7

1074H-06			
噴嘴	(B) 壓力 (bars)	(R) 半徑 (m)	(Q) 流量 (l/min)
1	1.7	8.2	1.7
	3.0	8.8	2.4
	4.5	9.1	3.2
2	1.7	8.5	2.4
	3.0	9.1	3.2
	4.5	9.4	3.9
3	1.7	8.8	3.0
	3.0	9.4	4.1
	4.5	9.4	3.9
4	1.7	9.4	4.1
	3.0	10.1	5.6
	4.5	10.4	7.1
5	1.7	10.1	5.5
	3.0	11.0	7.2
	4.5	11.6	8.6
6	1.7	10.1	6.9
	3.0	11.0	9.4
	4.5	11.6	8.6
7	1.7	10.1	9.0
	3.0	11.6	12.0
	4.5	12.2	14.6
8	1.7	11.0	11.0
	3.0	11.9	14.5
	4.5	12.8	17.6
9	1.7	11.3	12.2
	3.0	12.5	17.5
	4.5	13.7	22.4
10	1.7	12.2	19.0
	3.0	14.0	26.1
	4.5	14.6	31.7
11	1.7	12.8	25.9
	3.0	14.6	34.1
	4.5	15.5	40.4
12	1.7	12.8	33.8
	3.0	14.6	45.0
	4.5	15.8	53.7

1074H-10			
噴嘴	(B) 壓力 (bars)	(R) 半徑 (m)	(Q) 流量 (l/min)
5	2.5	11.3	15.5
	3.5	11.9	18.9
	5.0	12.5	22.9
10	3.0	13.7	35.8
	4.0	14.3	41.3
	5.5	15.2	48.9
15	3.0	14.6	47.7
	4.0	15.2	53.7
	5.5	16.5	61.5
20	4.0	16.2	66.2
	5.0	17.1	73.7
	6.5	18.0	84.2
25	4.0	17.7	87.1
	5.0	18.9	98.7
	6.5	20.1	115.1


※美國專利產品，可直接調整角度或調成360°全圓旋轉



### 1074K-04RPS

噴頭規格：1/2"  
噴灑角度：5~360°/全迴轉  
噴灑半徑：5.1~9.0m  
跳昇高度：4"(10cm)  
(低壓止水)

K-RAIN MINIPRO

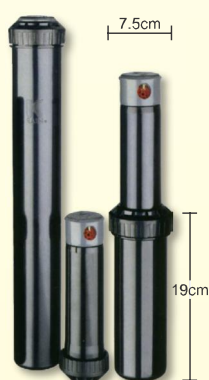

### 1074K-06

噴頭規格：3/4"  
噴灑角度：5~360°/全迴轉  
噴灑半徑：11.6~15.3m  
跳昇高度：5"(12.5cm)  
12"(30cm)(訂製品)


K-RAIN PROPLUS



### 1074K-06RPS

噴頭規格：3/4"  
噴灑角度：5~360°  
噴灑半徑：11.0~15.5m  
跳昇高度：4"(10cm)  
(低壓止水)

K-RAIN RPS75

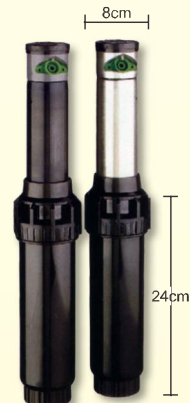

### 1074K-10

噴頭規格：1"  
噴灑角度：5~360°/全迴轉  
噴灑半徑：13.7~21.6m  
跳昇高度：4"(10cm)  
(低壓止水)

K-RAIN PROSPORT

1074K-04RPS			
噴嘴	(B) 壓力 (kg/cm <sup>2</sup> )	(R) 半徑 (m)	(Q) 流量 (lpm)
#0.75	2.1	5.1	3.3
	2.8	5.1	3.3
	3.4	5.4	3.3
#1	2.1	6.0	3.3
	2.8	6.3	5.0
	3.4	6.3	5.0
#1.5 預裝	2.1	6.9	6.7
	2.8	7.2	6.7
	3.4	7.2	8.3
#2	2.1	7.5	8.3
	2.8	8.1	8.3
	3.4	8.1	10.0
#3	2.1	8.4	11.7
	2.8	9.0	13.3
	3.4	9.0	13.3

1074K-06			
噴嘴	(B) 壓力 (kg/cm <sup>2</sup> )	(R) 半徑 (m)	(Q) 流量 (lpm)
#2.5 預裝	2.0	11.6	9.5
	2.7	11.9	10.7
	3.4	12.2	12.2
#0.5	4.1	12.5	13.2
	2.0	8.5	1.8
	3.0	8.8	2.3
#0.75	3.4	8.8	2.7
	4.0	9.1	3.0
#1	2.0	8.8	2.7
	3.0	9.1	3.0
	3.4	9.4	3.3
#2	4.0	9.8	3.8
	2.0	9.8	5.0
	3.0	10.1	5.7
#3	3.4	10.4	6.0
	4.0	10.7	6.8
#4	2.0	11.3	9.0
	3.0	12.2	9.3
	3.4	12.8	1.3
#6	4.0	13.1	12.5
	2.0	11.6	13.5
	3.0	11.9	15.8
#8	3.4	12.5	17.3
	4.0	12.8	18.8
	2.0	13.1	16.5
#10	3.0	14.0	19.2
	3.4	14.0	21.2
	4.0	14.9	22.2
#12	3.0	13.7	22.2
	3.5	14.0	22.7
	4.0	14.6	2.8
#15	5.0	14.9	25.3
	3.0	12.8	30.2
	3.5	13.7	32.0
#20	4.0	14.8	35.8
	5.0	15.3	37.8

1074K-06RPS			
噴嘴	(B) 壓力 (kg/cm <sup>2</sup> )	(R) 半徑 (m)	(Q) 流量 (lpm)
#3 預裝	2.1	11.0	7.5
	2.8	11.6	9.2
	3.4	12.2	10.2
#0.5	4.1	12.2	11.0
	2.1	8.5	1.8
	2.8	8.8	2.3
#0.75	3.4	8.8	2.7
	4.1	9.1	3.0
#1	2.1	8.8	2.7
	2.8	9.1	3.0
	3.4	9.1	3.3
#2	4.1	9.4	3.8
	2.1	9.1	3.3
	2.8	9.4	3.8
#4	3.4	9.4	4.5
	4.1	9.8	5.0
	2.1	9.8	4.5
#6	2.8	10.1	5.3
	3.4	10.4	6.0
	4.1	10.4	6.8
#8	2.1	11.0	9.8
	2.8	12.2	11.3
	3.4	12.8	12.8
#10	4.1	12.8	14.0
	2.1	11.6	15.2
	2.8	13.1	18.5
#12	3.4	14.0	20.8
	4.1	14.3	22.7
	2.1	13.7	22.7
#15	2.8	14.6	25.7
	3.4	14.9	28.8
	4.1	15.5	31.0

1074K-10			
噴嘴	(B) 壓力 (kg/cm <sup>2</sup> )	(R) 半徑 (m)	(Q) 流量 (lpm)
#2.5 預裝	2.8	13.7	19.3
	3.5	14.3	22.3
	4.1	14.3	24.7
#0.5	4.8	14.9	26.8
	3.5	16.2	40.2
	4.1	15.9	44.3
#0.75	4.8	16.2	47.7
	5.5	16.8	51.0
#1	3.5	17.4	49.2
	4.1	18.0	53.8
	4.8	18.0	58.3
#2	5.5	19.2	62.5
	4.1	19.8	71.5
	4.8	20.4	77.7
#3	5.5	21.0	82.8
	6.2	21.6	87.8
	4.1	20.4	86.3
#4	4.8	21.6	93.8
	5.5	22.9	100.3
	6.2	23.5	101.3
#5	4.1	20.4	89.7
	4.8	21.0	96.8
	5.5	21.0	104.2
#6	6.2	21.6	110.5





### 1074R-04

噴頭規格：1/2"  
噴灑角度：5~360°  
噴灑半徑：4.6~10.7m  
跳昇高度：4"(10cm)  
RAIN BIRD 3504



### 1074R-06

### 1074RS-06 (不鏽鋼心軸)

噴頭規格：3/4"  
噴灑角度：5~360°  
噴灑半徑：7.6~15.2m  
跳昇高度：4"(10cm)  
RAIN BIRD 5004 / 5004PS



### 1074R-10

噴頭規格：1"  
噴灑角度：5~360°  
噴灑半徑：11.9~19.8m  
跳昇高度：4"(10cm)  
RAIN BIRD 6504 / 6504S

(B) 壓力 (kg/cm <sup>2</sup> )	噴嘴 Nozzle	(R) 半徑 (m)	(Q) 流量 (lpm)	(B) 壓力 (kg/cm <sup>2</sup> )	噴嘴 Nozzle	(R) 半徑 (m)	(Q) 流量 (lpm)
1.7	0.75	4.6	2.0	3.0	0.75	5.2	2.8
	1.0	6.1	2.8		1.0	6.4	4.0
	1.5	7.0	4.0		1.5	7.3	5.5
	2.0	8.2	5.3		2.0	8.2	7.2
	3.0	8.8	8.2		3.0	9.4	11.2
2.0	4.0	9.4	11.2	3.8	4.0	10.6	15.3
	0.75	4.8	2.2		0.75	5.5	3.2
	1.0	6.2	3.2		1.0	6.7	4.5
	1.5	7.0	4.3		1.5	7.3	6.2
	2.0	8.2	5.7		2.0	8.5	8.2
3.0	3.0	9.1	8.8	4.0	3.0	9.8	12.3
	4.0	9.7	12.2		4.0	10.7	17.3

(B) 壓力 (kg/cm <sup>2</sup> )	噴嘴 Nozzle	(R) 半徑 (m)	(Q) 流量 (lpm)	(B) 壓力 (kg/cm <sup>2</sup> )	噴嘴 Nozzle	(R) 半徑 (m)	(Q) 流量 (lpm)
1.7	1.5	10.1	4.2	3.5	1.5	10.7	6.2
	2.0	10.7	5.7		2.0	11.3	8.2
	2.5	10.7	6.8		2.5	11.3	10.0
	3.0	11.0	8.5		3.0	12.2	12.3
	4.0	11.3	11.0		4.0	12.8	16.2
	5.0	11.9	14.0		5.0	13.7	20.5
	6.0	11.9	16.2		6.0	14.2	24.2
	8.0	11.0	22.3		8.0	14.9	32.2
2.5	1.5	10.4	5.2	4.5	1.5	10.4	7.0
	2.0	11.0	6.8		2.0	10.7	9.2
	2.5	11.3	8.3		2.5	11.3	11.3
	3.0	11.2	10.3		3.0	12.2	14.0
	4.0	12.3	13.5		4.0	12.8	18.3
	5.0	12.7	17.2		5.0	13.7	23.3
	6.0	13.2	20.2		6.0	14.6	27.3
	8.0	13.3	27.1		8.0	15.2	36.5

(B) 壓力 (kg/cm <sup>2</sup> )	噴嘴 nozzle	(R) 半徑 (m)	(Q) 流量 (l/min)	(B) 壓力 (kg/cm <sup>2</sup> )	噴嘴 nozzle	(R) 半徑 (m)	(Q) 流量 (l/min)	(B) 壓力 (kg/cm <sup>2</sup> )	噴嘴 nozzle	(R) 半徑 (m)	(Q) 流量 (l/min)
2.1	4	11.9	10.8	3.5	8	15.5	28.2	4.5	16	19.2	61.8
	6	13.1	15.6		10	16.2	34.8		18	19.5	67.2
2.5	4	12.3	12.0		12	16.8	60.7	5.0	4	12.7	16.8
	6	13.5	17.4		14	18.0	48.6		6	14.9	24.6
	8	14.9	25.2		16	18.6	54.6		8	15.7	34.2
	10	15.5	30.6		18	18.1	58.8		10	17.2	41.4
	12	16.2	36.6	4.0	4	12.5	15.0		12	18.1	51.0
	14	16.8	42.6		6	14.4	22.2		14	18.6	58.8
3.0	16	16.8	47.4		8	15.5	30.6	5.5	16	19.2	65.4
	18	18.0	51.6		10	16.6	37.2		18	19.8	70.8
	4	12.5	13.2	4.5	12	17.3	45.0		4	13.1	17.4
	6	14.1	19.2		14	18.5	52.2		6	14.9	25.8
	8	15.1	25.8		16	19.1	58.2		8	16.1	35.4
	10	15.8	31.8		18	19.0	63.6		10	16.8	43.8
3.5	12	16.4	38.4		4	12.5	16.2	6.0	12	18.6	52.8
	14	17.2	44.4	4.5	6	14.6	23.4		14	18.6	61.2
	16	17.4	49.8		8	15.5	32.4		16	19.2	68.4
	18	18.0	54.0		10	17.1	39.6		18	19.8	73.8
3.5	4	12.5	13.8	4.5	12	17.7	48.0	6.2	18	19.8	79.8
	6	14.9	21.0		14	18.6	55.2		18	19.8	82.2

景觀用隱藏式噴頭 (半徑4.6~19.8m)



### 1074N-06 1074NS-06 (不鏽鋼心軸)

噴頭規格：3/4"  
噴灑角度：5~360°/全迴轉  
噴灑半徑：9.2~15.6m  
跳昇高度：10cm

signature 6002 / 6005



### 1074N-10 1074NS-10 (不鏽鋼心軸)

噴頭規格：1"  
噴灑角度：5~360°/全迴轉  
噴灑半徑：9.4~19.2m  
跳昇高度：10cm

1074N-06											
噴嘴	(B) 壓力 (kg/cm <sup>2</sup> )	(R) 半徑 (m)	(Q) 流量 (lpm)	噴嘴	(B) 壓力 (kg/cm <sup>2</sup> )	(R) 半徑 (m)	(Q) 流量 (lpm)	噴嘴	(B) 壓力 (kg/cm <sup>2</sup> )	(R) 半徑 (m)	(Q) 流量 (lpm)
4	1.4	9.2	3.8	7	1.4	11.6	8.3	10	1.4	12.8	20.4
	2.5	9.5	5.3		2.5	12.2	10.2		2.5	14.6	25.7
	3.5	10.4	6.4		3.5	12.5	11.7		3.5	14.9	30.3
5	1.4	10.1	4.5	8	1.4	11.6	11.7	11	1.4	12.8	24.2
	2.5	11.3	6.1		2.5	12.8	15.1		2.5	14.6	30.7
	3.5	11.6	7.2		3.5	13.1	17.4		3.5	15.6	36.0
6	1.4	9.8	5.3	9	1.4	12.8	15.9				
	2.5	11.6	7.2		2.5	14.3	20.4				
	3.5	12.2	8.7		3.5	14.6	23.8				



### HT-I90 大型隱藏式噴頭

噴頭規格：1 1/2"  
噴灑角度：I90-ADV：5~360°  
I90-36：360°  
噴灑半徑：I90-ADV：20.1~27.4m  
I90-36：21.3~29.3m  
工作壓力：4~7kg/cm<sup>2</sup>  
噴灑流量：114~262lpm

HUNTER I90 如需含電磁閥噴頭請來電洽詢



### RB-750, 950 大型隱藏式齒輪噴頭

噴頭規格：1", 1 1/4", 1 1/2"  
噴灑半徑：  
1"：5.5~16.8m  
1 1/4"：17~25m  
1 1/2"：20.9~29.9m

如需詳細資料請來電